




- SOLID WOOD
- VENEERED ENGINEERED WOOD
- LAMINATES
- OUTDOOR DECK
- ARTIFICIAL TURF
- PVC SPORTS
- SURFACES



# Lumber

SOLIDWOOD FLOORING

Bring in the classic elegance with Lumber solid wood flooring. Any ambience can come alive with the deep and rich shades available in our range of solid wooden flooring. Designed and produced with your evolving lifestyle in mind, Lumber range of solid wood floors live on adding grace and enriching your living space.

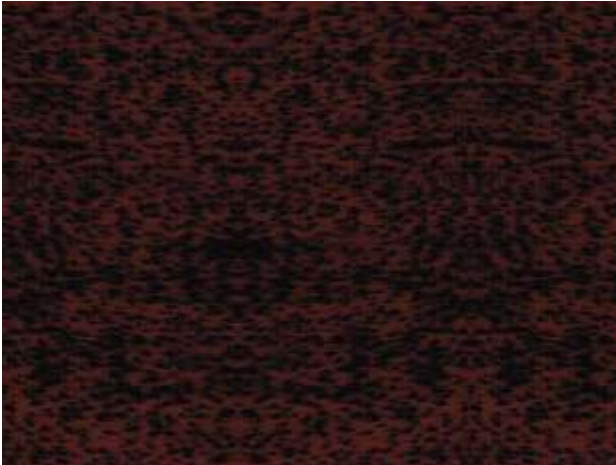

MERBAU  
Thickness: 18mm



JATOBA  
Thickness: 18mm



IPE  
Thickness: 18mm



OAK  
Thickness: 18mm



BAMBOO  
Thickness: 15mm



ACACIA  
Thickness: 18mm

**PAR-KY®**

**PRO**

Optimal price/quality proportion



A unique quality floor for the price of a laminate

The PRO collection offers a choice in short, wide boards in the trendiest kind of wood: high quality, nicely priced. All the advantages of all other PAR-KY floorings, you will also encounter in the PRO collection, so you can enjoy the warmth and comfort of real wood, together with the niceties of laminate: easy to maintain and to install.

\* quick ship item





Brushed European Oak \*  
European Oak



Sealed Teak \*  
Teak



Brushed Desert Oak  
Stained Oak



Sealed Smoked Walnut \*  
Stained Walnut




Brushed Milk Oak  
Stained Oak



Sealed American Cherry  
American Cherry



Brushed Chocolate Oak \*  
Stained Oak

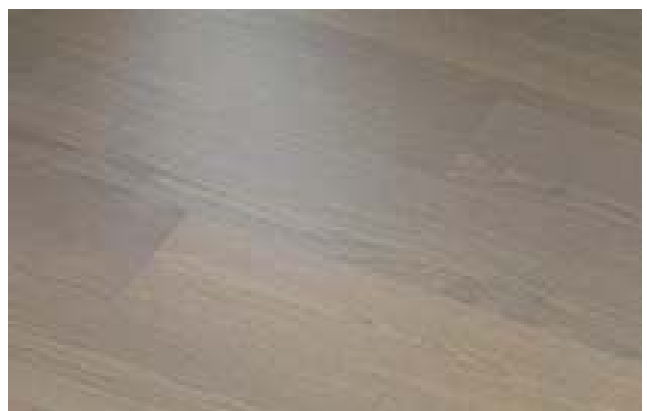

Brushed Mystery Oak  
Stained Oak



**Lumber**  
LAMINATE FLOORING PRO



Rustic Oak  
1132



Merbau  
9168



Classic Walnut  
6359



Colorado Santos  
8289



Crystal Cherry  
9935



Espresso Oak  
020121



Oak  
8105




American Walnut  
20143



Oak Allover  
010310



Prestige Oak  
XD 611

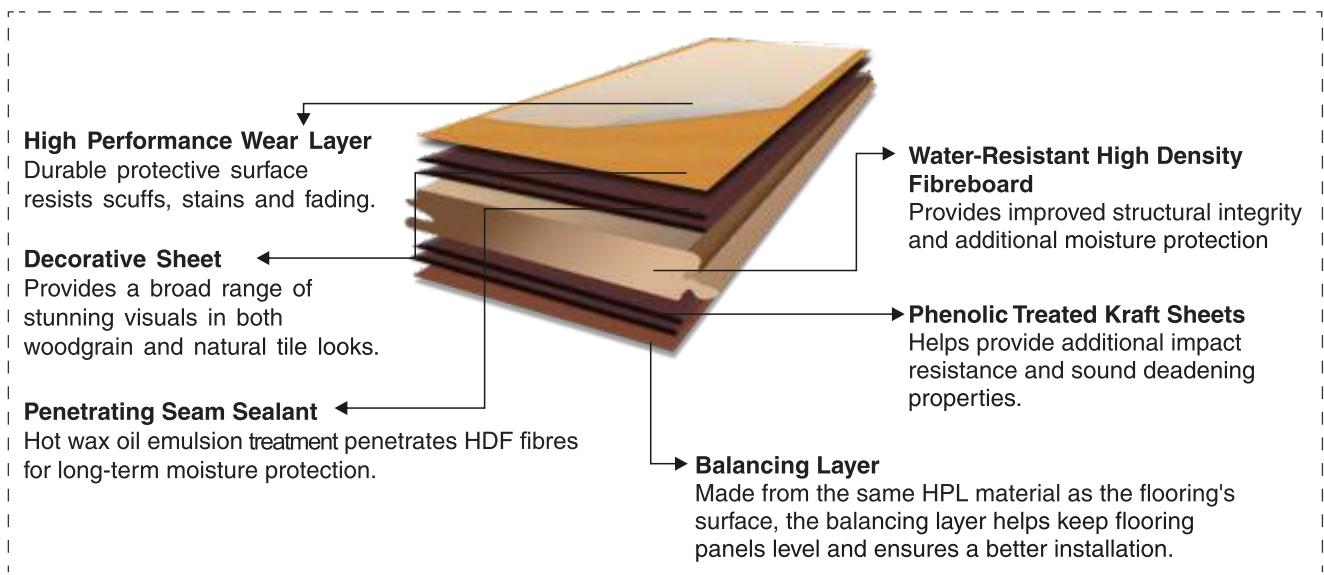







Antique Oak 6065  
LC 50



Walnut 6026  
LD 200



Walnut 211  
LC 50



Smoked Oak 6028  
LD 200



Jatoba 460  
LC 50



Antique Oak 6029  
LD 200



Antique Brown Oak 6031  
LC 50



Antique Brown Oak  
LD 200



Walnut Harmonious 6039  
LD 300



SIPO 6043  
LD 300



Smoked Oak 6035  
LD 300



Natural Oak 287  
LD 300

**Technical Data**

	LC 50	LC 60	LC 70	LD 200	LD 300
<b>Measurement (mm)</b> length x width x thickness	1288 x 198 x 7	1288 x 198 x 7	1288 x 198 x 8	1287 x 198 x 8	2052 x 208 x 9
<b>P</b> <b>Wear Class</b>	23   31	23   31	23   32	23   32	23   32
 <b>Wear Resistance</b>	AC3 (= IP ≥ 2.000 U)	AC3 (= IP ≥ 2.000 U)	AC4 (= IP ≥ 4.000 U)	AC4 (= IP ≥ 4.000 U)	AC4 (= IP ≥ 4.000 U)
 <b>Impact Resistance</b>	IC 1	IC 1	IC 2	IC 2	IC 2
 <b>Resistance to cigarette ash burns</b>	Grade 4	Grade 4	Grade 4	Grade 4	Grade 4
 <b>Slip Resistance</b>	DS	DS	DS	DS	DS

A photograph of a modern outdoor deck. In the foreground, there's a hot tub with a mosaic tile interior. The deck is made of dark grey composite decking. Several lounge chairs with blue and green cushions are arranged around the deck. There are also planters with green plants. The background shows a building with large windows and balconies.

**DECKCLIQ**  
modular decking system

*We embrace where you step !*



IPE

Available in Plank and Tile form



Acacia



Plank



Tile

#### INSTALLATION

Deck Clic™ unique modular design is quick to install and easily customizable for irregular floor designs, challenging corners and uneven base. The DIY customization can be achieved by sawing off excess material to accommodate perfect fit.

STAGE 1- Measure the floor surface intending to be covered (length and width dimensions). Input the measurements into Deck Clic™ Modulator™ available in this website to derive at estimated units of Deck Clic™ needed. STAGE 2- Installation of Deck Clic™ should commence from the outer most corner of the intended area. Lay the first module and attach an adjacent module by affixing the linking pins into the slots of the previous unit. STAGE 3- Follow stage 2 assembly instruction consecutively, until the entire intended area has been covered effectively. STAGE 4- The tiles are ready for surface finishing. The floor must be coated with decking oil immediately after laying; if this is not done, the wood could oxidize, turning grey or darken in color. STAGE 5- To customise Deck Clic™ for irregular corners, simply cut the module into desired shape using hand saw or circular saw. Factory fitted screws are to be removed prior to the cutting of the module and should be replaced at appropriate slots on the remaining area subsequently, to ensure that all wooden area are firmly attached to the base.

#### MAINTENANCE

To maintain the appealing appearance and protect the integrity of the timber decking, it is vital to take simple steps to retain the deckings' optimum performance and durability every 6 months. STEP 1- Rinse all timber to be treated, with running water to remove dirt and oil from surface and allow to dry. For deckings that are painted, sanding is required to restore to the original bare timber before cleaning. STEP 2- Ensure the timber protective oil is well mixed before application. Apply the oil generously using a good quality brush to coat the wood slats with the oil thoroughly. Use multi-directional strokes to ensure all grains are evenly treated. Work the oil into the timber and let it set for a few minutes before proceeding to wipe off the excess oil and allowing to dry. STEP 3- Allow 18 hours of drying time\* between coats. (\*Low temperature and high humidity days require longer drying intervals.) STEP 4- Apply second coat of oil, repeating similar process as described in step 2.


### Technical Specifications

PRODUCT	Modular decking with innovative interlocking system
PRODUCT ORIGIN	Malaysia
COLOUR	Natural wood colours
VISUAL APPEARANCE	Smooth
PHYSICAL ATTRIBUTES	Very dense, tight grained patterns and shrink resistance.
WOOD QUALITY	Medium-to-high-density tropical hardwood (based on weight criterion) Provides high resistance against humidity and insects attack. Pre-oil-treated timber slate for durability.
TIMBER SPECIES	Acacia Belian
APPLICATION	Various uses for projects or home improvements such as : Swimming pool decking areas   Terraces   Gardens   Backyards Patios   Saunas & Spas   Pathways   Alfresco utilities area
DIMENSIONS OF TILES	30 x 450 x 450 mm    1.5-3.0 kg
DIMENSIONS OF PLANK	18 x 95 x 1200/1800 mm
SUPPLEMENTARY	Straight Reducer (STR) Corner Reducer (CNR)




**POLYDECK**  
COMPOSITE WOOD DECK FLOORING

COMPOSITE WOOD DECK FLOORING

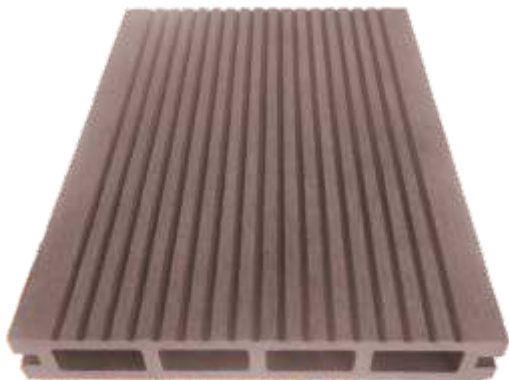

C1

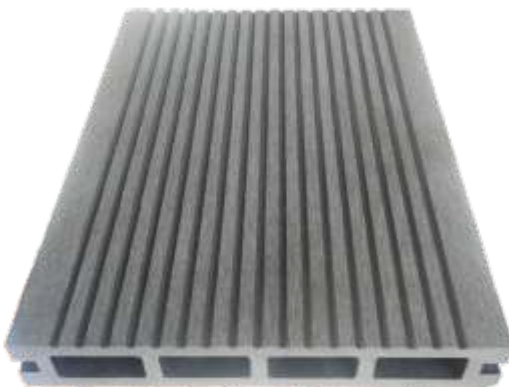

C2



C4

Sizes Available: 23mm x 145mm x 2900mm

The sustainable alternative to Wood Decks

WPC Decks known as Wood Plastic Composite are a superior material that combines the beauty of wood with the strength and durability of a polymer. The life span of wood is limited when it is used in outdoor applications. You have to treat your wooden decking repeatedly and apply oils. Both softwood and exotic wood will fade, peel, split and create splinters over time.

However, there is an excellent material; PolyDeck WPC, a superior alternative to wood that does not rot, warp, or splinter. PolyDeck products look great through decades of use and exposure to outdoor weather conditions. That's because it's made through a unique process that turns high-quality reclaimed wood fibers and virgin plastic resins into strong, moisture resistant decking, cladding, and pergola products.

PolyDeck is an environmentally friendly construction/landscape material manufactured with the latest technologies.

Hidden fasteners

Either stainless steel or polymer, our clip system enables hidden, flexible and fast installation for planks. This means that each individual plank can be removed if required.

Rapid and easy installation

The clip system, perfectly dimensioned planks, and fascia boards facilitate installation and reduce laying times. Standard tools are all that are required for installation. Cutting edges are always straight and true.

Save on maintenance costs

No more annual applications of UV protection, saturation coatings, varnish, lacquer or other costly chemical products. No labour cost either.

Anti-slip qualities

Our sections provide a safe and non-slip surface, ideal for decks, external terraces, garden and marina installations, pontoons and garden decking or swimming pool surrounds.

Guaranteed without knots or splinters

PolyDeck WPC planks provides a surface that feels good to live with, but which also creates a safe environment for children, and all barefoot activities. No more worries about popped screw heads.

Easy to maintain

To clean your PolyDeck WPC product all you need is soap & water. If you'd like to restore PolyDeck WPC to it's original state, all you need to do is sandpaper your PolyDeck.

TORLYS smart leather  
**starts beautiful. stays beautiful.**

# TORLYS

## smart floors

### LEATHER TILE

TORLYS Leather Tile floors come in a wide selection of natural colors in a contemporary palette, in two different gloss treatments: matte or medium gloss.

Genova Cognac  
LTU48352

Genova Chocolate  
LTU48351

Genova Black  
LTU48353

Catania  
LTU48359

Novara Black  
LTU48357

Genova Fawn  
LTU48354

Milano Pecan  
LTU48362

Milano Brown  
LTU48361

Modena Wine  
LTU48356

Modena Brown  
LTU48355

#### The Look

Matte or medium gloss, in distinctive natural leather grains

#### The Feel

Rich and inviting, pleasing to the touch  
Attached CorkPlus™ underlay with Microban® antimicrobial treatment

#### The Details

Micro bevel-edge, four sides  
Made from 100% recycled leather  
3/8" (thickness) x 15-1/4" (width) x 15-1/4" (length)  
10.5 mm (thickness) x 388 mm (width) x 388 mm (length)





Creta 1



Venezia 4



CRETA 1 - CREAM



CRETA 2 - DESERT



CRETA 3 - GREY

	Y	Z	X
Y	500 mm	200 mm	12±27 mm
Z	200 mm	200 mm	12±27 mm
X	12±27 mm	12±27 mm	12±27 mm

	1,00 m <sup>2</sup> (10 szt./pcs.)	2,00 m <sup>2</sup> (10 szt./pcs.)
Weight	≈ 19 kg	≈ 19 kg

Zobacz więcej inspiracji na:  
 See more inspiration on:



Available on the  
**App Store**

ANDROID APP ON  
**Google play**

**YouTube** [stegu.tv](http://stegu.tv)

# STILEX

## WPC FLOOR PLANKS

Step in Style Step on STILEX

- WATER-PROOF
- TERMITE-PROOF
- EASY INSTALLATION
- ALSO FOR WALL/CEILING PANELLING
- RE-USEABLE WITH LONG LIFE

### Technical details

Dimension	DIMENSION		900 x 142 mm
Stärke	THICKNESS		7,2 mm
Nutzschicht	WEAR LAYER		0,5 mm
Trägermaterial	SUPPORT		WPC
Profil	PROFIL		Unilin click
Gleitreibwert	SLIP RESISTANCE	EN 1815	DS
Elektrostatisches Verhalten	ELECTROSTATIC VOLTAGE	EN 1401	antistatic
Stuhlrollen	STAIR ROLLS	EN 425	passed
Verschleißgruppe	WEAR RESISTANCE	EN 660-2	Group T
Feuerbeständig	FIRE RESISTANCE	EN 13501	Bfl S1
Packetgröße	PACKAGE		1,41 m <sup>2</sup>





## Wooden tiles



## WOOD VENEERED EXTERIOR DOORS

Nothing adds value to a home like its beautiful facade-and central to that is an exterior or entry door which is both stunningly magnificent yet functional in terms of durability and security.



We take time to create an extensive line of door designs, and innovate our production technology to give you the best quality doors.



**WOOD VENEERED EXTERIOR & INTERIOR DOORS**



**MDF PVC DOORS**



**MDF PVC DOORS**



Limonta Artificial Grass



**SOCCER PRO**



**AIR CHANNEL**



**DECOFLEX™**



**COURTSOL COMFORT**

# WE MAKE WOOD BETTER



Available at



Imported in India by:

**Buildstar Projects Private Limited**

( A Modyworld Enterprise )

130/1, Ulsoor Road, Bangalore-560 042.

tel: +91 80 41320101/41320400/25588591, fax: +91 80 25587881

email: [info@buildstar.in](mailto:info@buildstar.in), [www.buildstar.in](http://www.buildstar.in)

